



Installation

A stunning and efficient panel designed to deal with sound reflection, focus on medium and high frequencies, this model is designed while its wooden surface with scattering of selected holes, control and absorption of frequencies in the range of 250 Hz up to 4000 Hz. Other unique features of this panel are "RT reduction" and "Sweet spot sound field distribution". A collection of acoustic monofoam with painted wood veneer with polyurethane paint, such a panel has created an impressive attraction. We recommend you to use this panel in control room recording room, home studio, broadcast studio singing room and drama room.

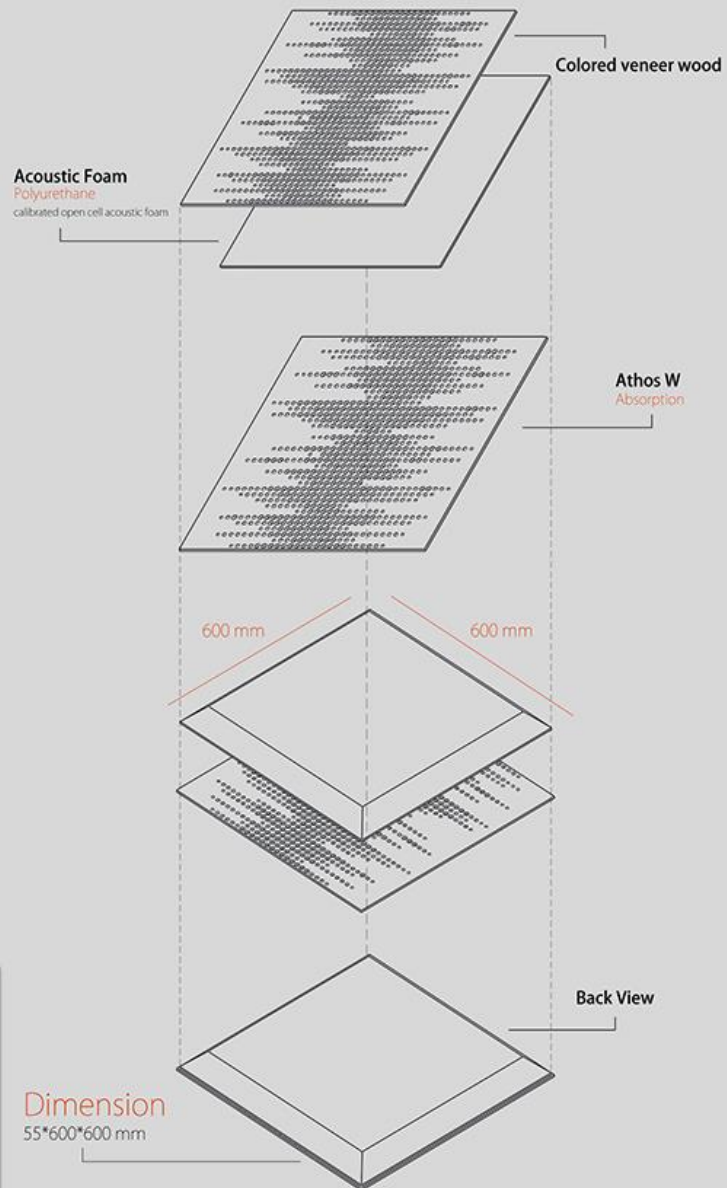

www.Deconik.net

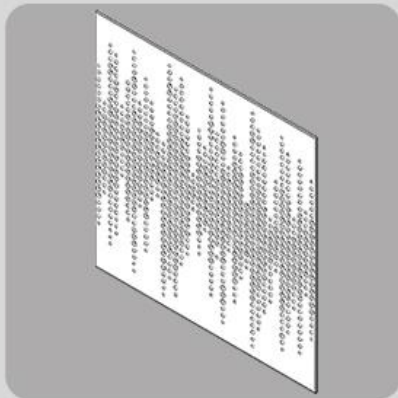