



## Installation

Deconik microphone isolator has provided a high-density, portable and easy-to-collect panel version called Flexiscreen Alpha. One of the characteristics of this acoustic panel is the high cohesion of the polyurethane foam, which helps to maximize absorption efficiency. The acoustic panel surrounds the microphone and produces clear sound in low and middle frequencies. This panel has a dual function. The inner surface absorbs the frequency and bass of the singer's voice, and at the same time, the outer surface of the panel absorbs the reflections scattered in the environment. The structure of the acoustic foam has the desired density and thickness. With the design of the holes, it has provided a common mechanism to strengthen the absorption effect and control the reflections. This panel can be assembled very easily in the shortest time with the fasteners inside the pack panel around the microphone vertically.

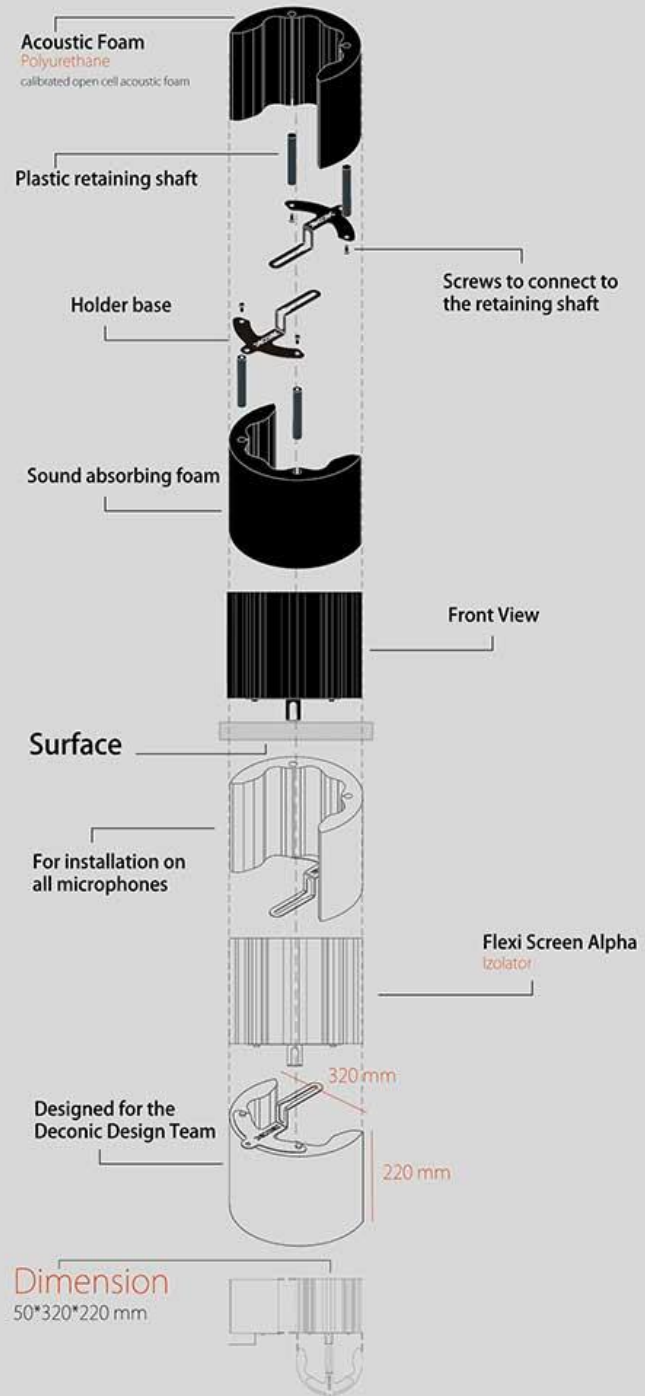

[www.Deconik.net](http://www.Deconik.net)

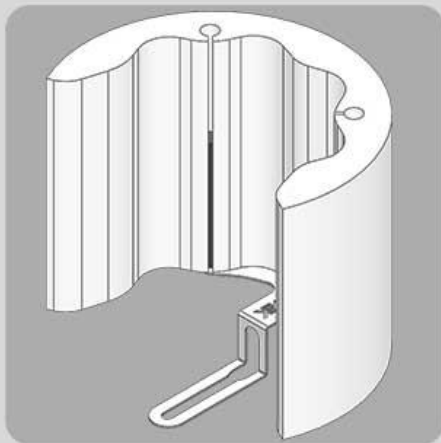