



Installation

This panel is a creative design with the aim of optimizing the sound. The holes on the wooden surface of the panel are created in such a way that it plays with sound radiation and at the same time beautifully offers an impressive sound treatment in the range of 315 Hz to 3150 Hz. The absorber is tuned to control over-reflection, reduce reverberation time, and control echo at medium frequencies. As a result, it helps clarity and breadth of speech perception. It is recommended to use this acoustic panel in home studio, Hi-Fi listening room, media room, home theater and reception halls. Consists of monofoam with wood veneer painted with polyurethane paint.

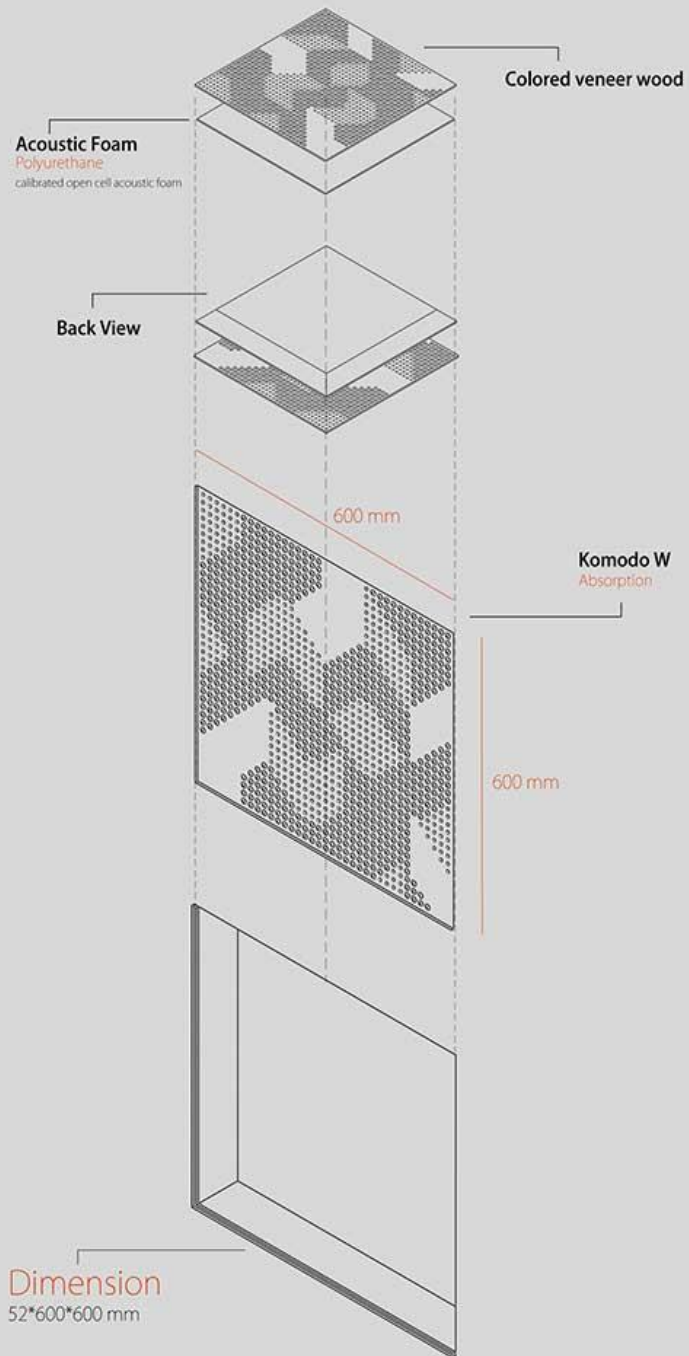

www.Deconik.net

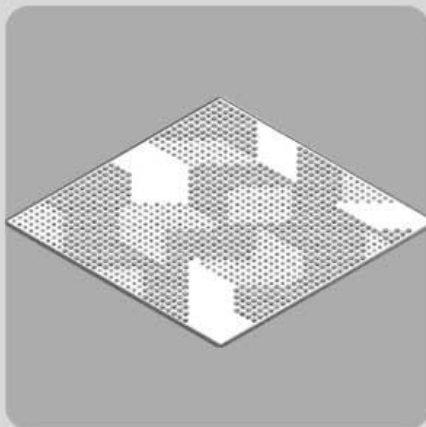