



## Installation

The appearance of this bass trap sample is designed based on the wave wood panel in the category of absorbers and diffusers. Polyurethane wood veneer has two functions that provide medium to high frequency absorption to control reflections in the corners without turning off the sound while also acting as a diffuser. Designed to effectively absorb low frequencies between 60 Hz and 125 Hz, and has a maximum efficiency of between 75 Hz and 100 Hz. Recommended for auditoriums, home theaters recording studios post-production studios rehearsal rooms, conference and teleconference rooms, lecture halls, distance learning rooms public spaces, halls performance spaces, etc.

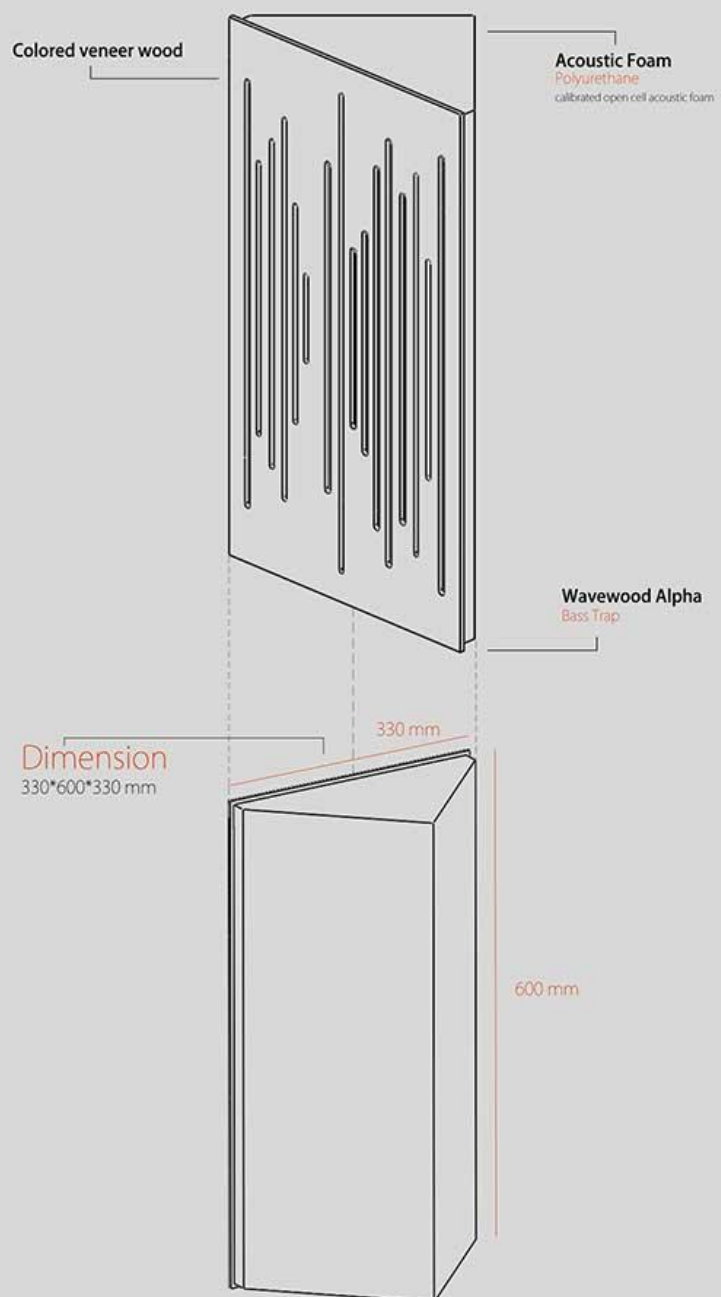

[www.Deconik.net](http://www.Deconik.net)

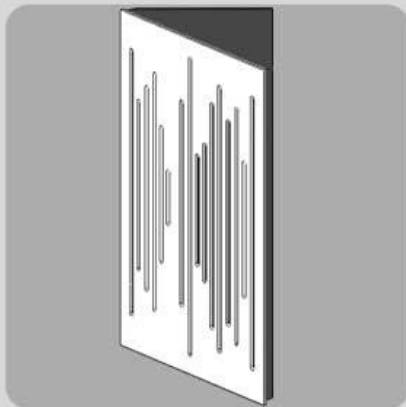